



**PIPE EQUIPMENT SPECIALISTS LTD**

## **PIPE STANDS & ROLLERS**



Tel: +44 (0)1869 324 144

**[www.TAG-PIPE.com](http://www.TAG-PIPE.com)**

E-mail: [sales@tag-pipe.com](mailto:sales@tag-pipe.com)


17

TAG Pipe Equipment Specialists manufactures pipe stands that have been designed to give you the highest quality at the best price.

TAG Tri Stands are constructed from box section and are available with a variety of different head styles to suit any application.

## Features and Advantages

- 1 1/8" Square box section construction
- 1,585kg / 3,500lbs load capacity
- Choice of fixed base or folding leg base
- Folding legs allow for easy storage and transportation
- Comprehensive range of 9 different head styles
- Adjustable in height from 27—48" (71—122cm)
- Independently load tested
- CE Conformity Certified with CE Mark

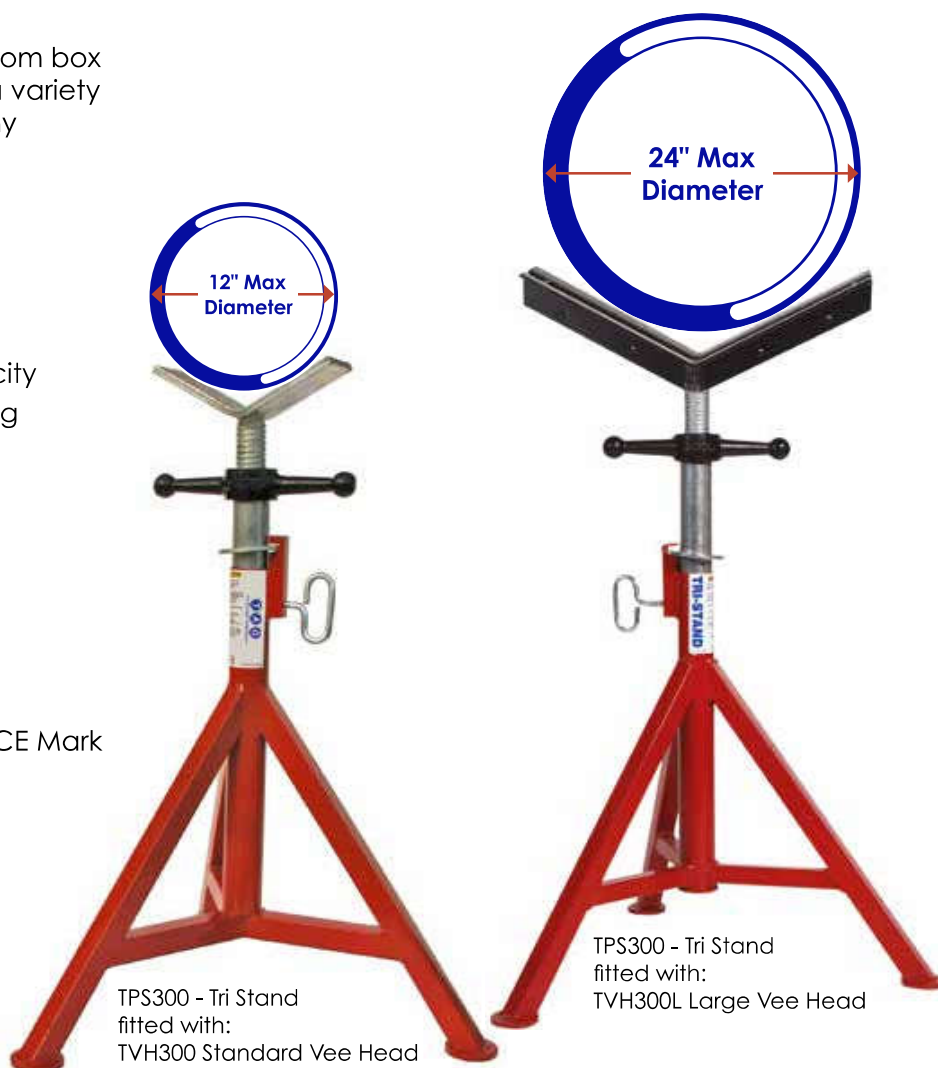

## Tri Stand (base only)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
TPS300	1,585kg / 3,500lbs	7.6kg / 17lbs	1-24"

## Folding Tri Stand (base only)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
TFS301	1,585kg / 3,500lbs	7.6kg / 17lbs	1-24"

## Vee-Head



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
TVH300	1,585kg / 3,500lbs	3.4kg / 7lbs	Up to 12"

## Large Vee Head (see page 23 for Head options)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
TVH300L	1,585kg / 3,500lbs	7.6kg / 17lbs	Up to 24"

## Steel Wheel (slip on style)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
SWH300	450kg / 990lbs	3.4kg / 7lbs	1-12"
* SWH300SS	450kg / 990lbs	3.4kg / 7lbs	1-12"

## Steel Wheel



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
SWH350	1,000kg / 2,205lbs	4.9kg / 11lbs	1-24"
* SWH350SS	1,000kg / 2,205lbs	4.9kg / 11lbs	1-24"

## Nylon Wheel (slip on style)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
* NWH300	450kg / 992lbs	2kg / 5lbs	1-12"

## Nylon Wheel



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
* NWH350	450kg / 990lbs	3.3kg / 7lbs	1-24"

## Ball Transfer (slip on style)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
BTH300	450kg / 990lbs	2.5kg / 6lbs	1-12"
* BTH300SS	450kg / 990lbs	2.5kg / 6lbs	1-12"

## Roller Bar



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
RBH300	1,000kg / 2,205lbs	4.25kg / 9lbs	n/a
PBH300	1,000kg / 2,205lbs	4.25kg / 9lbs	Up to 12"

## Pipe Chain Vice



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
PCV300	1000kg / 2205lbs	6.5kg / 14.3lbs	0.5-6"

## Stainless Steel (slip on style)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
* SSH300	1,585kg / 3,500lbs	1.0kg / 2lbs	1-12"

The Duo is height adjustable and uses quick change style heads. Designed for large diameter pipe rotation and feeding. With locking brakes on the wheels to secure the load for marking, layout or fit-up.

Now supplied with folding legs as standard for ease of use and transport and ultra safe pin locking design.

## Features and Advantages

- Load capacity 2,400kg / 5,290lbs
- Folding legs for ease of transport and storage
- Self centering head adjustment from either side
- Height adjustable 29 to 43" (74—109cm)
- 1/2 to 48" (12—900 mm) pipe diameter capacity
- Quick height adjustment with additional fine thread for workpiece levelling
- 'Trued' wheels eliminate 'corkscrewing' of pipe during rotation
- Lockable wheels to hold pipe in position
- Safety pins to lock stand at working height
- CE Conformity Certified with CE Mark

The Duo Stand utilises the fine adjustment thread. This allows precise adjustment of the working height and can compensate for uneven surfaces to ensure pipe is level at all times.

The unique safety locking pins allow the Duo Stand to be fixed at the various working heights.

Final adjustment and leveling can then be made with the fine adjustment handle.



NEW  
IMPROVED  
PIN LOCK  
DESIGN



Max 109cm / 43"  
Min 74cm / 29"





# TAG DUO STAND OPTIONS

The Quick Change style heads increase the versatility of the duo stand.

The heads can be changed in a matter of seconds, without tools, to adapt to almost any applications.

Roller wheels are available in steel, stainless steel or nylon. Ball transfer heads are available in steel or stainless steel.

## Simple Head Changeover




1. Lift quick release tab



2. Slide forward and remove



Various height holes enable the operator to fix the stand at the required working height using the safety locking pins

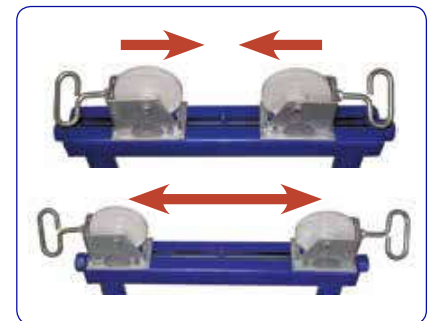

Self centering adjustable heads from 1—48" pipe

### Base Unit Only



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)
DPS200	2,400kg / 5,290lbs	19.5kg / 43lbs

### Pair Nylon Wheel Heads



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)
* NWH200	450kg / 990lbs	2.2kg / 5lbs

### Pair Ball Transfer Heads



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)
BTH200	1,450kg / 3,197lbs	3kg / 6lbs
* BTH200SS	1,450kg / 3,197lbs	3kg / 6lbs

### Pair Steel Wheel Heads



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)
SWH200	2,400kg / 5,290lbs	3kg / 6lbs
* SWH200SS	2,400kg / 5,290lbs	3kg / 6lbs

\* Suitable for Stainless Steel



Tel: +44 (0)1869 324 144

[www.TAG-PIPE.com](http://www.TAG-PIPE.com)

E-mail: [sales@tag-pipe.com](mailto:sales@tag-pipe.com)





# QUATTRO STANDS

*Heavy duty pipe stands for large diameter and heavy wall pipe*

The Quattro Heavy Duty Pipe Stands are the ideal solution for heavy duty pipe handling, in the workshop or for site applications.

The Large Vee Head, heavy duty base and variety of head options make the Quattro the most durable and versatile pipe stand on the market.

The Quattro stand can be used as a simple jack stand, supplied as standard with levelling pads to accommodate uneven working surfaces. Weight load tested to 2,265kg / 5,000lbs per stand.

The Quattro stands can also be supplied with lockable 8" castor wheels so pipes of up to 36" diameter and any length can be moved around a workshop or site, without the need for a crane or forklift.

## Features and Advantages

- Load capacity 2,265kg / 5,000lbs
- Variety of head options available
- Optional castor wheels for pipe transportation
- Height adjustable
- Heavy duty box section construction
- CE Conformity Certified with CE Mark



Max 92cm / 36"  
Min 61cm / 24"



Levelling pads  
supplied as standard

Max 112cm / 44"  
Min 82cm / 32"



QVH400 Large  
Vee-Head shown  
with SWH400 steel  
wheels fitted

Shown with RWK400 roller wheel kit fitted

Transport pipe  
around the site  
or workshop  
with ease



## Base Unit (complete with levelling pads)



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
QPS400	2,265kg / 5,000lbs	10kg / 22lbs	n/a

## Large Vee-Head



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
QVH400	2,265kg / 5,000lbs	8.5kg / 19lbs	1-36"

## Steel and Stainless Steel Wheels

These four-wheel kits can be fitted into the QVH400 large V-head to enable pipe to be rotated. Steel and stainless steel wheels are available to suit all applications.



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
SWH400	1,200kg / 2,645lbs	4kg / 8lbs	1-36"
* SWH400/SS	1,200kg / 2,645lbs	4kg / 8lbs	1-36"

## Ball Transfer Head

Consists of two 1-1/2" roller balls which can be mounted in vee-head slots for a range of up to 36" (915mm) pipe.



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
BTH400	1,200kg / 2,645lbs	2.3kg / 5lbs	1-36"
* BTH400/SS	1,200kg / 2,645lbs	2.3kg / 5lbs	1-36"

## Nylon Wheel

The kit consists of four nylon wheels that can be mounted into the QVH400 Large vee-head, to enable the Quattro Stand to be used with stainless steel without the risk of marking the pipe.



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
* NWH400	450kg / 990lbs	1.8kg / 4lbs	1-36"

## Stainless Steel Sleeves

When working with stainless steel pipe, the sleeve option instantly converts the Quattro Stand into a speciality tool for stainless steel welding, preventing carbon contamination.



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
* SSS400	2,265kg / 5,000lbs	1kg / 2lbs	1-36"

## Hold Down Device

The Hold-Down Device uses high tensile strength for gripping pipe onto the large vee-head when either welding or using the Quattro stand for pipe transportation. Chain extension kits available for pipe up to 36" (101cm). Standard upto 18".



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
HDD400	n/a	7kg / 16lbs	1-36"

## Roller Wheel Kit

Four 8" (20cm) heavy duty wheels make up the Quattro Stand Roller Wheel Kit. The wheels have a quick action brake system.

*Weight load capacity  
dependant on head style*



PART NO.	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)	PIPE SIZE
RWK400	1,225kg / 2,700lbs	11kg / 24lbs	n/a





## UNO STANDS

*Specialist Pipe Stands for low level and tight access*



The UNO STAND is a basic single tubed pipe stand, simple to use and easy to set-up.

Popular for tight access jobs in power stations, submarines, refinery's etc.

A favourite for low level work in all fab shops. Available in 4 standard heights.

Optional roller heads from the Tri Stand series (page 19) can also be fitted to the Vee head of the UNO Stand to suit varying applications.



Steel Wheel Head



Nylon Wheel Head



Ball Transfer Head



Roller Bar Head



Uno with Castor Wheels

Please see  
page 19  
for all Head  
options

PART NO.	MIN/MAX HEIGHT (MM / INCH)	LOAD CAPACITY (KG / LBS)	PIPE SIZE
UPS01	175—300mm / 7—12"	450kg / 1000lbs	Up to 12"
UPS02	300—425mm / 12—17"	450kg / 1000lbs	Up to 12"
UPS03	425—550mm / 17—22"	450kg / 1000lbs	Up to 12"
UPS04	550—675mm / 22—27"	450kg / 1000lbs	Up to 12"

*We can manufacture to any height with 125mm / 5" range*



## TRI CHAIN VICE STAND

*A simple but effective solution to small bore pipe handling*

**Optimised Base For More Working Area** – Benders are located at the rear of the base and three tool hangers are provided

**Integrated Ground Lug** – Provides a conductive surface to connect the earth cable

**Self Hooking for 4" Pipe** – No need to use a second hand to engage the chain into the wear plate

**Leg Chain** – Retains legs even when subjected to rugged use during operation and transport

**Rugged Tool Tray** – Prolonged stability before requiring a leg adjustment

PART NO.	DESCRIPTION	PIPE SIZE	WEIGHT (KG / LBS)	WORKING HEIGHT (CM / INCH)
TCVS6	Tri Chain Vice Stand	0.5—6"	21kg / 46lbs	91cm / 36"
PCV6	Pipe Chain Vice Clamp	0.5—6"	5kg / 11lbs	n/a

*Stainless Steel Jaws and Chain Kit available*







# MEGA PIPE STAND

*Heavy duty stand that can withstand the toughest pipe fabrication abuse*



The TAG Mega Pipe Stand fits nicely between the more common Pipe Jack and Pipe Stand lines and the much heavier duty Turning Roll products that are available on the market today.

The Mega Pipe Stand safely holds larger diameter heavy wall pipe off the ground at an ergonomic height, while allowing the slight height adjustment for fit ups via the twin 1 3/4 solid acme rods.

Extra features like four way forklift capabilities or optional v groove wheels allow the durable Mega Pipe Stand to be moved with ease within heavy duty pipe fabrication facilities.

If you have a heavy wall fabrication project up to 48 inches, the Mega Pipe Stand is your answer.

## Features and Advantages

- Capacity 5 ton (5000kg / 11000lbs) as shown with urethane wheels.
- 4 - 48 inch pipe capacity.
- Operational height 30-42 inches.
- Shipping weight 100kg/220lbs.
- 4 way fork lift access points.
- Heavy duty 1 3/4 inch solid acme rod for durable yet precise adjustment under load.
- Optional spring loaded transport cart or v groove track cart available.
- 3x10" urethane over steel wheels standard for exotic or carbon pipe with bearings for smooth rotation.
- Stainless or carbon block v head available to eliminate pipe rotation.

PART NO.	DESCRIPTION	LOAD CAPACITY (KG / LBS)	PIPE SIZE
MPS5UR	Mega Pipe Stand with Urathane rollers	5000kg / 1100lbs	4—48"
MPS5VH	Mega Pipe Stand with Carbon v-head	5000kg / 1100lbs	4—48"
MPS5VHSS	Mega Pipe stand with Stainless v-head	5000kg / 1100lbs	4—48"



# TAG HIGH PIPE STAND

*Easy and safe for high pipe working applications*

The TAG Pipe 6ft folding jack allows a pipe fabricator to hold pipe in a safe position up to 6ft tall.

The folding design with handle allows easy transport into tight spaces and the bottom T handle locks the jack open while minimizing stand wobble.

The 6 foot jack is ideal in any location where increased height pipe fit ups are necessary but can also be used in normal height conditions when adjusted in a lower height position.

## Features and Advantages

- Height adjustment from 39" to 72" tall
- 450kg / 1,000lbs weight capacity
- Increased width of stance increases stability
- Convenient carry handle for transport into and around work sites
- Lock washer can be fastened to base for safety
- Folding design allows easy transport and convenient storage

PART NO.	LOAD CAPACITY (KG / LBS)	PIPE SIZE
HPS600	450kg / 1000lbs	Up to 12"



# TAG PIPE CART

*The easy way to move and store pieces or bundles of pipe*

## Features and Advantages

- Transports up to 8m / 24ft lengths
- 2,200lbs capacity
- Carries up to 36 inch pipe, squares, bundles, and more
- Designed for paved shop floors
- Shipping weight 80kg / 175lbs



PART NO.	DESCRIPTION	LOAD CAPACITY (KG / LBS)	PIPE SIZE
PC1	Pipe Cart	1000kg / 2200lbs	Up to 36"

# TAG PIPE BUGGY

*The safe and easy way to move pipe around the job site*

The Pipe Buggy offers a safe method of handling and moving pipes around the workshop or site easily, avoiding damage to the pipe as a result of it being dragged along the ground. At only 31.8kg / 70lbs it is a light weight yet robust solution to pipe handling problems.

With its innovative handle and ratchet strap it allows the operator to lift the pipe from the floor onto the buggy with minimal effort.

**Max Pipe diameter:** 12"

**Max Pipe length:** 6.1m

**Max Pipe weight:** 450kg / 990lbs

## Features and Advantages

- Flat free tyres
- Ratchet hold down strap to secure pipe
- Quick disconnecting handle for easy storage



## Lift easily in 3 simple steps

- 1** Secure Buggy to pipe in the upside down position using the strap supplied.



- 2** Use handle for leverage to flip Buggy & pipe.



- 3** Reposition handle to walk with pipe.



PART NO.	DESCRIPTION	HEIGHT		WIDTH		WIDTH BETWEEN WHEELS		LENGTH		WEIGHT	
		INCH	CM	INCH	CM	INCH	CM	INCH	CM	KG	LBS
PB1	Pipe Buggy	21	53	28	71	16	41	28	71	31.8	70

# TAG PIPE DOLLY

*The TAG Biggy Buggy*

TAG Pipe's Pipe Dolly are used in many field operations allowing the transportation of pipe without the need for a gas or electric powered lift.

## Features and Advantages

- Transports pipe up to 24ft
- 2,200lbs capacity
- Carries up to 20 inch pipe, fittings, boxes, and more
- Sold with flat free tires as a standard
- Shipping weight 80kg / 175lbs with some assembly required



PART NO.	LOAD CAPACITY (KG / LBS)	PIPE SIZE
PD1	1000kg / 2200lbs	20"



# **TAG** PIPE CRADLES & SLINGS

TAG Pipe Cradles and Slings are an effective way to move pipe, specifically designed for pipeline installation projects. TAG currently offers cradles from 2—24 inch and all are equipped with 4 inch urethane “round cut” wheels with sealed anti-friction bearings. All spreader bar designs are third party tested and comply with industry standards. These models are equipped with 5/8 wire rope and all rope is swaged and certified at a wire rope rigging company partnered with TAG.

## **Features and Advantages**

- Durable 90a urethane coating designed for multiple uses
- Sealed anti-friction bearings
- Measures 4 inch tread width x 4.5 inch diameter
- Designed for use with 5/8 wire rope
- Machined hub for smooth wheel rotation

PART NO.	DESCRIPTION	LOAD CAPACITY (KG / LBS)
T2001	Roller Sling 2—8"	1,300kg / 3,000lbs
T2002	2 Strand Roller Cradle 6—12"	7,710kg / 17,000lbs
T2003	2 Strand Roller Cradle 12—24"	7,710kg / 17,000lbs
T2004	4 Strand Roller Cradle 12—24"	12,700kg / 28,000lbs



T2001



T2002



T2003



T2004

## **TAG** ROLLER STANDS *Light duty low level roller stands for pipe feeding*

### **Features and Advantages**

- Extremely easy pipe feeding
- Free standing or In-trench options
- Differing trench widths accommodated
- Multi positional
- Rubber coated rollers minimise pipe damage
- Three sizes available to suit pipes from 63mm to 1200mm



PRS2



PRS1

PART NO.	PIPE DIAMETER RANGE (MM / INCH)	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)
PRS1	63—355mm / 2—14"	200kg / 440lbs	5kg / 11lbs
PRS2	250—630mm / 10—24"	1000kg / 2200lbs	12kg / 27lbs
PRS3	500—1200mm / 20—48"	1000kg / 2200lbs	13kg / 29lbs
PRT1	63—355mm / 2—14"	200kg / 440lbs	6kg / 13lbs




PRT1 - Pipe Roller for trenches



# TAG ROLLER STANDS

*Floor or Bench mountable pipe trestles*

These heavy duty stands are designed to be either floor or bench mounted. Available with 4 head adjustable styles to suit pipes from 4" to 48".

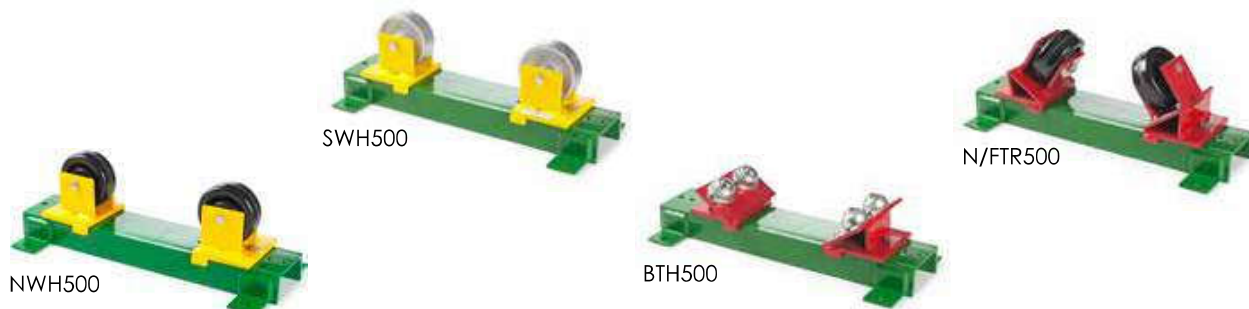

PART NO.	HEAD STYLE	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)
RPS500	Base unit only	2,400kg / 5,290lbs	5.8kg / 13lbs
SWH500	Pair steel wheel heads	2,400kg / 5,290lbs	3.5kg / 8lbs
* SWH500SS	Pair stainless steel wheel heads	2,400kg / 5,290lbs	3.5kg / 8lbs
* NWH500	Pair nylon wheel heads	450kg / 990lbs	2.2kg / 5lbs
BTH500	Pair ball transfer heads	1,450kg / 3,197lbs	3.5kg / 8lbs
* BTH500SS	Pair stainless steel ball transfer heads	1,450kg / 3,197lbs	3.5kg / 8lbs
S/FTR500	Pair steel feed through roller	2,400kg / 5,290lbs	3.5kg / 8lbs
* SS/FTR500	Pair stainless steel feed through roller	2,400kg / 5,290lbs	3.5kg / 8lbs
* N/FTR500	Pair nylon feed through roller head	450kg / 990lbs	3.0kg / 7lbs

\* Suitable for Stainless Steel

# TAG QUICK CHANGE ROLLERS

*Rapid, self centering pipe trestles*



PART NO.	HEAD STYLE	LOAD CAPACITY (KG / LBS)	WEIGHT (KG / LBS)
QCR501	Base unit only	2,400kg / 5,290lbs	5.9kg / 13lbs
SWH200	Pair steel wheel heads	2,400kg / 5,290lbs	3.8kg / 8lbs
* SWH200SS	Pair stainless steel wheel heads	2,400kg / 5,290lbs	3.8kg / 8lbs
* NWH200	Pair nylon wheel heads	450kg / 990lbs	2.2kg / 5lbs
BTH200	Pair ball transfer heads	1,450kg / 3,197lbs	3kg / 7lbs
* BTH200SS	Pair stainless steel ball transfer heads	1,450kg / 3,197lbs	3kg / 7lbs

\* Suitable for Stainless Steel



Tel: +44 (0)1869 324 144

[www.TAG-PIPE.com](http://www.TAG-PIPE.com)

E-mail: [sales@tag-pipe.com](mailto:sales@tag-pipe.com)






# PIPE RACK ROLLERS & LAUNCHERS

*Heavy Duty Beam Clamp & Rigging Rollers*

## Features & Advantages

- Eight configurations from 2,500lbs to 22,000lbs capacity
- Two sizes from 2—48" pipe diameters
- Urethane wheels with sealed bearings
- Easy replace wheels bolt off and on in minutes
- Charges from rack roller to pipe launcher in minutes
- Comes ready to use on Stainless Steel

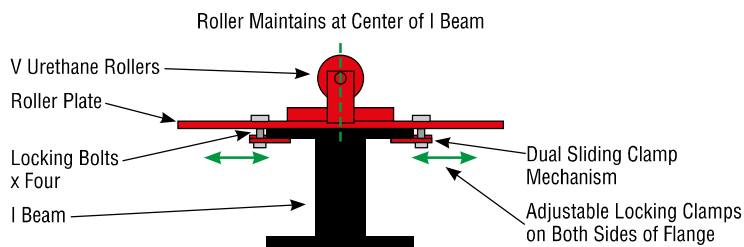

2110 Beam Clamp  
2,500lbs capacity  
24" pipe capacity



2115HD Launcher  
7,500lbs capacity  
24" pipe capacity

2125HD Beam Clamp  
22,000lbs capacity  
48" pipe capacity



All parts are an easy bolt on/off design for quick replacement

PART NO.	DESCRIPTION	PIPE SIZE (MM / INCH)	LOAD CAPACITY (KG / LBS)
T2110	Beam Clamp Pipe Roller	50—610mm / 2—24"	1,135kg / 2,500lbs
T2110HD	Heavy Duty Beam Clamp Pipe Roller	50—610mm / 2—24"	3,410kg / 7,500lbs
T2115	Pipe Launcher Stand	50—610mm / 2—24"	1,135kg / 2,500lbs
T2115HD	Heavy Duty Pipe Launcher Stand	50—610mm / 2—24"	3,410kg / 7,500lbs
T2125	Beam Clamp Pipe Roller	100—1220mm / 4—48"	5,000kg / 11,000lbs
T2125HD	Heavy Duty Beam Clamp Pipe Roller	100—1220mm / 4—48"	10,000kg / 22,000lbs
T2126	Pipe Launcher Stand	100—1220mm / 4—48"	5,000kg / 11,000lbs
T2126HD	Heavy Duty Pipe Launcher Stand	100—1220mm / 4—48"	10,000kg / 22,000lbs



## 1 TON PIPE ROTATOR

*Speed adjustable, pedal operated, floor/bench rotator*

Our NEW entry level 1 ton rotator set (1 drive unit + 1 idler) with foot pedal control, and fine speed adjustment, is proving to be most popular in fabrication workshops across the globe!

- Additional idler units available to accommodate pipe length
- Larger & heavier duty units also available

*\* Suitable for Stainless Steel*



PART NO.	WHEEL DIMENSION (MM / INCH)	MAX DRIVE CAPACITY (KG / LBS)	TURNING CAPACITY (MM / INCH)	WHEEL LINEAR SPEED	POWER
T1TPR	250mm / 10"	1000kg / 2200lbs	115—500mm / 4—20"	0.2—2min	110v / 220v



Tel: +44 (0)1869 324 144

[www.TAG-PIPE.com](http://www.TAG-PIPE.com)

E-mail: [sales@tag-pipe.com](mailto:sales@tag-pipe.com)

